

# THE UNITED STATES OF AMERICA

**TO ALL TO WHOM THESE PRESENTS SHALL COME:**

**UNITED STATES DEPARTMENT OF COMMERCE  
United States Patent and Trademark Office**


**May 17, 2004**

**THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM  
THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK  
OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT  
APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A  
FILING DATE.**

**APPLICATION NUMBER: 10/444,433**

**FILING DATE: May 23, 2003**

**RELATED PCT APPLICATION NUMBER: PCT/US04/09370**



**By Authority of the  
COMMISSIONER OF PATENTS AND TRADEMARKS**



*M. Sias*  
**M. SIAS  
Certifying Officer**


**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

5.27.3  
10444433-052403

Atty. Dkt. No. 026032-4227

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

Applicant: Soditch et al.  
Title: VEHICLE SEAT WITH AUTO-FOLD LEG  
Appl. No.: Unknown  
Filing Date: May 23, 2003  
Examiner: Unknown  
Art Unit: Unknown

<b>CERTIFICATE OF EXPRESS MAILING</b>	
I hereby certify that this correspondence is being deposited with the United States Postal Service's "Express Mail Post Office To Addressee" service under 37 C.F.R. § 1.10 on the date indicated below and is addressed to: Commissioner for Patents, PO Box 1450, Alexandria, Virginia 22313-1450.	
EL 716377505 US (Express Mail Label Number)	5/23/03 (Date of Deposit)
Lori A. Wilson (Printed Name)	
 (Signature)	

**UTILITY PATENT APPLICATION**  
**TRANSMITTAL**

Mail Stop PATENT APPLICATION  
Commissioner for Patents  
PO Box 1450  
Alexandria, Virginia 22313-1450

Sir:

Transmitted herewith for filing under 37 C.F.R. § 1.53(b) is the nonprovisional utility patent application of:

Milton S. Soditch  
7901 Birkenstock Dr.  
Brighton, MI 48114

Sean A. Riley  
25965 Cobblers Lane  
South Lyon, MI 48178

Vladimir Nastevski  
3412 Starr  
Royal Oak, MI 48073

Douglas A. Siewert  
424 Little Lake Drive  
Condo 12  
Ann Arbor, MI 48103

Brian Holder  
15734 Susses  
Lixonia, MI 48154

Atty. Dkt. No. 026032-4227

Robert A. Wilson  
 4414 Standing Timbers Lane  
 Toledo, OH 43623

## Enclosed are:

- ☒ Specification, Claim(s), and Abstract (17 pages).
- ☒ Informal drawings (5 sheets, Figures 1, 2, 3, 4, 5, 6, 7, 8 and 9).
- ☒ Declaration and Power of Attorney (5 pages).
- ☒ Assignment of the invention to Johnson Controls Technology Company.
- ☒ Assignment Recordation Cover Sheet.
- ☒ Check in the amount of \$40.00 for Assignment recordation.
- ☒ Information Disclosure Statement.
- ☒ Form PTO-1449 with copies of 13 listed reference(s).
- ☒ Application Data Sheet (37 CFR 1.76).

## The filing fee is calculated below:

	Claims as Filed	Included in Basic Fee	Extra Claims	Rate	Fee Totals
Basic Fee				\$750.00	\$750.00
Total Claims:	20	20	0	x \$18.00	= \$0.00
Independents:	3	3	0	x \$84.00	= \$0.00
If any Multiple Dependent Claim(s) present:				+ \$280.00	= \$0.00
				SUBTOTAL:	= \$750.00
<input type="checkbox"/> Small Entity Fees Apply (subtract 1/2 of above):					= \$0.00
				TOTAL FILING FEE:	= \$750.00

- ☒ A check in the amount of \$750.00 to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge any additional fees which may be required regarding this application under 37 C.F.R. §§ 1.16-1.17, or credit any overpayment, to Deposit Account No. 06-1447. Should no proper payment be enclosed herewith, as by a check being in the wrong amount, unsigned, post-dated, otherwise improper or informal or even entirely missing, the Commissioner is authorized to charge the unpaid amount to Deposit Account No. 06-1447.

Atty. Dkt. No. 026032-4227

Please direct all correspondence to the undersigned attorney or agent at the address indicated below.

Respectfully submitted,

Date 5/23/03By James A. Wilke

FOLEY &amp; LARDNER

Customer Number: 31050



31050

PATENT TRADEMARK OFFICE

Telephone: (414) 297-5776

Facsimile: (414) 297-4900

James A. Wilke  
Attorney for Applicant  
Registration No. 34,279

Atty. Dkt. No.: 026032-4227

**U.S. PATENT APPLICATION**  
**for**  
**VEHICLE SEAT WITH AUTO- FOLD LEG**

**Inventors:**     **Milton S. Soditch**  
                      **Sean A. Riley**  
                      **Vladimir Nastevski**  
                      **Douglas A. Siewert**  
                      **Brian Holder**  
                      **Robert Wilson**

## VEHICLE SEAT WITH AUTO- FOLD LEG

### BACKGROUND OF THE INVENTION

[0001] The present invention relates generally to the field of vehicle seats and more particularly relates to a vehicle seat having automatic folding legs.

[0002] It is known to provide a vehicle seat, for example, an automotive seat having a reclineable back. It is also known to provide a vehicle seat having a reclineable back and an independently movable seat base. It is also known to provide a vehicle seat having a movable seat base that pivots to an upright position. It is also known to provide a vehicle seat having an adjustable lumbar consisting of a flexible member having a first end anchored and a second end moved with respect to the first end to cause the flexible member to vary its shape to provide adjustable support within the lumbar region of an automotive seat.

[0003] Notwithstanding the known devices, there remains a significant need to develop a vehicle seat having a seat base which is capable of pivoting to an upright position with a one-hand operation of a user. Further, there remains a need to provide a vehicle seat that includes an automatic folding leg assembly. Further, there remains a need to provide a vehicle seat having an indicator to notify a user of a predetermined condition of the seat base.

[0004] It is desirable to provide a vehicle seat that provides one or more of these or other advantageous features. Other features and advantages will be made apparent from the present description.

Atty. Dkt. No.: 026032-4227

## SUMMARY OF THE INVENTION

**[0005]** One embodiment of the invention relates to a vehicle seat. The vehicle seat comprises a seat back coupled to a vehicle. A seat base is coupled to the seat back and configured to rotate from a seating position to a stored position. A leg assembly, having a leg member, is coupled to the seat base and configured to rotate from a deployed position to a retracted position. An indicator is coupled to the seat base to indicate a predetermined condition of the seat base. Another embodiment of the vehicle seat includes a cable coupled to the seat back and the leg assembly, wherein the cable moves the leg assembly from a deployed position to a retracted position when the seat base is moved from the seating position to the stored position and the leg assembly clears a cargo zone located under at least a portion of the seat base.

**[0006]** There is also provided a rear seat of a passenger carrying vehicle. The rear seat comprises a seat back coupled to the vehicle. A seat base is coupled to the seat back and configured to rotate from the seating position to a stored position. A leg assembly is coupled to the seat base and configured to rotate from a deployed position to a retracted position. An indicator is coupled to the seat base to indicate a predetermined condition of the seat base. Another embodiment of the rear seat includes a cable coupled to the seat back and leg assembly. The cable moves the leg assembly from the deployed position to the retracted position when the seat base is moved from the seating position to the stored position and the leg assembly clears a cargo zone located under at least a portion of the seat base. The rear seat may also include a biasing assembly coupled to the seat base and a leg assembly to assist in moving the leg assembly from the seating position to the stored position.

**[0007]** There is further provided a method for automatic retraction of a leg assembly coupled to a vehicle seat mounted in a

Atty. Dkt. No.: 026032-4227

vehicle. The vehicle seat includes a seat back and a seat base. The method comprises the steps of providing a cable of a predetermined length. Coupling one end of the cable to the seat back and coupling another end of the cable to the leg assembly. The leg assembly moves from a deployed position to a retracted position as the seat base is moved from a seating position to a retracted position and the leg assembly clears a cargo zone located under at least a portion of the seat base. Another embodiment of the method includes the step of providing a biasing member coupled to the leg assembly and the seat base configured to bias the leg assembly from the seating position to the stored position to assist the user of the vehicle seat to move the seat base.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0008] Fig. 1 is a side plan view of an exemplary embodiment of a vehicle seat and illustrating a seating position (solid line), intermediate position, and stored position (broken line).

[0009] Fig. 2 is a partial perspective view of an exemplary embodiment of a seat, without cushions, illustrating an automatic leg retraction mechanism and leg assembly.

[0010] Fig. 3 is a partial perspective rear view of an exemplary embodiment of the leg assembly illustrated in Fig. 2, with a biasing assembly.

[0011] Fig. 4 is a partial perspective front view of the exemplary embodiment of the leg assembly of Fig. 3.

[0012] Fig. 5 is a section view along line 5-5 in Fig. 2, illustrating an exemplary embodiment of a cable and cable conduit anchored to a back bracket and banana bracket, respectively, with the seat in a seating position.



Atty. Dkt. No.: 026032-4227

[0013] Fig. 6 is a section view of the seat illustrated in Fig. 5, with the seat in the stored position.

[0014] Fig. 7 is a partial view of a seat along line 7-7 in Fig. 2, illustrating a cable and cable conduit anchored to the leg assembly, with the seat (cushion in broken line) in a seating position.

[0015] Fig. 8 is a partial view of the seat illustrated in Fig. 7, with the seat (cushion in broken line) in a stored position.

[0016] Fig. 9 is a partial view of the seat illustrated in Fig. 8, with the leg member of the leg assembly movable from the seat base without stretching the cable, referred to as a "break-away" feature.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0017] Before beginning the detailed description of an exemplary embodiment, several general comments are warranted about the applicability and the scope of the present invention.

[0018] First, the illustrations relate to a seat (also can be referred to as a chair) particularly adapted for motor vehicles, such as cars, SUVs, vans, trucks, buses and the like, but the invention is applicable also to seating used in aircraft, railroad vehicles, nautical vehicles or other environments. The illustrated seat is a back seat of a van or SUV and is also referred to as a stadium seat. The seat may be configured as a split seat or a bench-type seat.

[0019] Second, the seat of the present invention is illustrated in the FIGURE as a padded seat having certain contours, trim and the like. While this configuration is presently preferred, a wide variety of seat configurations and appearances will benefit from use of the mechanical support and movement mechanisms. Also the exterior of the seat can be covered by fabric, vinyl, leather or other materials known and used in the seating art.

Atty. Dkt. No.: 026032-4227

[0020] Third, with regard to the seat described later herein, substantial modifications can be made without departing from the invention's intended scope. For example, while certain mechanical systems are described to move seat components to achieve certain results, other mechanisms, manual or powered could be substituted therefore. For example, where a screw drive is used in moving the thorax pivot location, other mechanical equivalents including, but not limited to, four bar linkages, air or hydraulic cylinders, air bladders, rack and pinion systems, cams and cables, gears, etc. could be employed. Another example is that for a pelvis support, i.e., a pair of clam-shell like devices (which are themselves already known in the art). They could be replaced by other known or subsequently developed support mechanisms. These mechanisms do not, in and of themselves, form part of the present invention, but when combined with the other pivot, support, rotation and moving mechanisms define the invention and result in more comfortable seating for the occupant.

[0021] Referring generally to the Figure and in particular to FIG. 1 there is shown a vehicle seat 10 for use in a vehicle 5 of any known type. The vehicle seat 10 includes a seat base 12 which supports a cushioned seat and a seat back 14. Seat base 12 and seat back 14 are independently pivotally connected to a base bracket 26. Such configuration allows occupant to use a fixed non-movable back or a recline/dump type back. The seat 10 can be either a manually adjustable seat or may be provided with electric motors to provide automated adjustment and electronic control of the seat. Such manipulation can be accomplished by the use of a change of position mechanism coupled to the seat 14 back and seat base 12. It is also contemplated that 2 separate mechanism may be used to provide flexibility in seat configuration. The change of position mechanism may provide for the

Atty. Dkt. No.: 026032-4227

back frame to move in proportional relation to the seat base 12 at a predetermined ratio, for example, moving the seat 11 one and a half millimeter per degree of seat 14 back movement if a recliner mechanism is provided. The seat 10 is connected to the floor of the support structure 6 of a vehicle 5 in any of a variety of configurations or designs which allow for the movement and adjustment of the seat 10 within the vehicle 5. The vehicle seat 10 may optionally include a headrest which may also be adjustable with respect to an occupant of the seat 10 such as any known or appropriate headrest.

[0022] The seat back 14 and seat base 12 of the vehicle seat 10 preferably includes a cushion 16 and a pair of side bolsters positioned on the sides of the seat back 14. The cushion 16 is preferably contoured to receive and support the body of an occupant of the vehicle seat 10. The side bolsters are also preferably aligned with respect to the cushion 16 and contoured to provide an angled, gradual support of the lateral side portions of an occupant of the vehicle seat 10. The cushion 16 and side bolsters preferably include a foam material (not shown) and a cover of any appropriate or known material such as cloth, vinyl, leather, etc. The cushion 16 and bolsters include support frames as more fully described below.

[0023] The seat back 14 further includes a back frame including a cover of any appropriate or known material such as cloth, vinyl, leather, etc. and which preferably matches the cover material of the cushion 16, side bolsters and seat base 12. However, it should be understood that a different material may be used on any element.

[0024] Referring now to Figs. 1-9, there is provided a seat 10 for a vehicle 5. The seat 10 comprises a seat back 14 coupled to the vehicle 5. A seat base 12 and seat back 14 are coupled to the base bracket 25 and with the seat base 12 configured to rotate from a seating position 18

Atty. Dkt. No.: 026032-4227

to a stored position 20. The seat back 14 is coupled by the base bracket 26 which is attached to the vehicle support structure 6 of the vehicle 5. A link bracket 28 is pivotably connected to the base bracket 26 by a suitable pivot pin. The base bracket 26 and the link bracket 28 can be composed of any suitable material such as metal (steel for example) or an engineered plastic of suitable strength.

[0025] Fig. 2, illustrates a cushion frame 30 without the cushion 16 for clarity purposes. It should be understood that the length and width of the cushion frame 30 can be of any suitable length as determined by the manufacturer of the vehicle seat 10.

[0026] A leg assembly 40 is coupled to the cushion frame 30 by a plurality of cushion brackets 32. The cushion brackets 32 are in a spaced apart relationship and can be fastened to the cushion frame 30 by any suitable means such as bolts, welding, or an adhesive. The cushion brackets 32 can be composed of any suitable material such as metal or an engineered plastic. A leg member 46 is coupled to the cushion frame 30 by the leg assembly 40. (See Fig. 2). The leg member 46 in the leg assembly 40 is configured to rotate from a deployed position 42 to a retracted or stored position 44. (See Fig. 1) The leg assembly 40 includes a leg bracket 52 which is attached to the cushion bracket 32 by a pivot pin. A leg spring 54 biases the leg member 46 towards the leg bracket 52 as seen in Figs. 3 and 4. The leg spring 54 maintains tension between the leg bracket 52 and the leg member 46 so that the leg member 46 follows the leg bracket 52 and cushion bracket 32 during movement of the seat base 12. The cushion bracket 32 is fixed to the cushion frame 30 and only moves in conjunction with the cushion frame. The illustrated leg member 46 is a single U-shaped tube. It should be understood that the leg member can have any suitable cross-section and may also be configured as two separate leg members operable in unison.

Atty. Dkt. No.: 026032-4227

[0027] A leg detent 48 is coupled to the vehicle 5. The leg detent 48 typically is located on the vehicle support structure 6 and includes an actuator or sensor 51 which is coupled to an indicator 50. The leg detent 48 may also be a leg catch retainer. (See Figs. 1 and 2) When the leg assembly 40 is in the deployed position 42, as shown in Figs. 1 and 2, the leg member 46 engages the leg detent 48 and contacts the actuator 51. A signal is transmitted to the indicator 50 to show that the leg assembly 40 is properly engaged with the leg detent 48. The actuator 51 can be any suitable device such as a micro switch. The indicator 50 can be electronic or mechanical device that gives a positive indication that the leg assembly 40 is properly engaged with the leg detent 48. The indicator 50 can be, for example, a light on the dashboard of the vehicle 5 or a colored flag associated with the seat 10.

[0028] The seat 10 can include an automatic folding capability that is provided by a cable 60 coupled to the seat back 14 and the leg assembly 40. The cable 60 is routed through a cable conduit 62. The cable conduit 62 has a first conduit anchor 64 connected to the link bracket 28 and the second conduit anchor 66 is coupled to the cushion bracket 32. (See Figs. 2, 3, 5, and 6.) A cable 60 is anchored to the back bracket 26 at a first cable anchor 70 and the other end of the cable 60 is connected to the leg bracket 52 at a second cable anchor 68. (See Figs. 3, 4, 5 and 7.) A cable 60 is of a predetermined length wherein the cable 60 moves the leg assembly 40 from the deployed position 42 to the retracted position 44 when the seat base 12 is moved from the seating position 18 to the stored position 20 and the leg assembly 40 clears a cargo zone 22 located under at least a portion of the seat base 12. (See Fig. 1.)

[0029] The end of the cable 60 is attached to the base bracket 26 at the cable anchor 70. The cable conduit 62, through which the

Atty. Dkt. No.: 026032-4227

cable is routed, has a first conduit anchor 64 connected to the link bracket 28 as seen in Figs. 5 and 6. The other end of the cable 60 is attached to the leg bracket 52 at a second cable anchor 68 (See Fig. 3) and the other end of the conduit 62 is attached to the conduit anchor 66 which is rigidly attached to cushion bracket 32.

[0030] When the seat base 12 which includes the cushion 16 and the cushion frame 30 moves to a stored position 20, the cable 60 is pulled because of increasing distance between the attachment point 70 at the base bracket 26 and the conduit end anchor 64 at the link bracket 28 (See Figs. 5 and 6). That arrangement causes the cable 60 to pull the leg bracket 52 which rotates from the vertical position into a position parallel to the plane of the cushion 16 (See Figs. 7 and 8). The leg member 46 is connected with a spring to the leg bracket 52 and the spring 54 tension between the bracket and leg causes the leg member 46 to follow the leg bracket 52. As the leg bracket 52 rotates about the pivot pin, the leg member 46 rotates with it around the same pin which forces the leg member 46 into the retracted position 44. (See Figs. 1, 7 and 8.)

[0031] When the seat base 12 is in the stored position 20 and the leg assembly 40 is in the retracted position 44 as shown in Fig. 1, the seat 10 is provided with a "break-away" feature. The break-away feature is provided by attaching the cable 60 to the leg bracket 52 rather than to the leg member 46. When the leg member 46 is pulled while the cushion 16 is in the stored position 20, the cable 60 does not stretch (pull) because it is connected to the leg bracket 52 and not the leg member 46. (See Fig. 9.) When a user pulls on the leg member 46 of the leg assembly 40, the leg member 46 pivots about the pivot pin and pulls against a leg spring 54. The leg spring 54 biases the leg towards the leg bracket 52 as described above.

Atty. Dkt. No.: 026032-4227

**[0032]** When the seat base 12 is moved from the stored position 20 to the seating position 18, a leg/cushion spring 34 forces the leg bracket 52 which in turn forces the leg member 46 to rotate forward to the deployed position 42. The leg member 46 follows the leg bracket 52 and the cushion bracket 32 as a result of the tension of the biasing assembly 41. The biasing assembly 41, as described above includes the leg/cushion spring 34 and the leg spring 54. The illustrated springs 34 and 54 are torsion springs mounted on the pivot pin that couples the cushion bracket 32, the leg bracket 52 and the leg member 46, all of which is referred to as the leg assembly 40.

**[0033]** There is also provided a method for automatic retraction of a leg assembly 40 coupled to a vehicle seat 10 mounted in a vehicle 5. The vehicle seat includes the seat back 14 and the seat base 12. The method comprises the steps of providing a cable 60 of a predetermined length. Coupling one end of the cable 60 to the base bracket 26 and coupling the other end of the cable 60 to the leg assembly 40. The leg assembly 40 moves from a deployed position 42 to a retracted position 44 as the seat base 12 is moved from the seating position 18 to a retracted position 20 and the leg assembly 40 clears a cargo zone 22 located under at least a portion of the seat base 12.

**[0034]** Another embodiment of the method includes the step of providing a biasing member 41 coupled to the leg assembly 40 and the seat base 12 and configured to bias the leg assembly 40 from the deployed position 42 to the retracted position 44 to assist the user of the vehicle 10 to move the seat base 12.

**[0035]** The method can also include the step of providing a leg detent 48 coupled to the vehicle 5 and configured to engage the leg assembly 40 when the leg assembly 40 is in the deployed 42 position. An indicator 50 can be coupled to one of the leg detent 48 and the seat

Atty. Dkt. No.: 026032-4227

base 12 to indicate a predetermined condition of the seat base 12. The indicator includes an actuator 51 mounted in the leg detent 48 and configured to contact the leg assembly 40 when the leg assembly 40 is properly engaged with the leg detent 48. The pre-determined condition can be that the seat 10 is properly deployed and engaged with the leg detent 48 or that the seat 10 is not properly deployed.

[0036] The method can also include the step of providing a leg bracket 52 coupled to the leg assembly 40 wherein the leg bracket 52 disengages the leg member 46 from the seat base 12 when a predetermined force on the leg member 46 is exceeded. The predetermined force is the biased tension of the leg spring 54. This allows the user to, as described above, pull the leg member 46 without stretching the cable 60.

[0037] Although the disclosed embodiments have been described in some detail, it should be understood that various changes, substitutions and alterations can be made to the embodiments without departing from their spirit and scope.



Atty. Dkt. No.: 026032-4227

## WHAT IS CLAIMED IS:

- 1           1.     A seat for a vehicle, the seat comprising:  
2                 a seat back coupled to the vehicle;  
3                 a seat base coupled to the vehicle and configured to rotate  
4     from a seating position to a stored position;  
5                 a leg assembly having a leg member coupled to the seat base  
6     and configured to rotate from a deployed position to a retracted position;  
7     and  
8                 an indicator coupled to the seat to indicate a predetermined  
9     condition of the seat base.
- 1           2.     The seat of claim 1, including a leg detent coupled to the  
2     vehicle and configured to engage the leg assembly when the leg assembly  
3     is in the deployed position.
- 1           3.     The seat of claim 1, including a cable coupled to the seat  
2     back and the leg assembly, wherein the cable moves the leg assembly  
3     from the deployed position to the retracted position when the seat base is  
4     moved from the seating position to the stored position and the leg  
5     assembly clears a cargo zone located under at least a portion of the seat  
6     base.
- 1           4.     The seat of claim 1, including a leg bracket coupled to the  
2     leg assembly wherein the leg bracket disengages the leg member from the  
3     seat base when a predetermined force on the leg member is exceeded.
- 1           5.     The seat of claim 1 including a biasing assembly coupled to  
2     the seat base and leg assembly to assist in moving the leg assembly from  
3     the deployed position to the retracted position.

Atty. Dkt. No.: 026032-4227

1           6.     The seat of claim 1, wherein the indicator includes an  
2     actuator mounted in the leg detent and configured to contact the leg  
3     assembly when the leg assembly is properly engaged with the leg detent.

1           7.     The seat of claim 6, wherein the indicator is one of a  
2     mechanical member and an electric device.

1           8.     A rear seat of a passenger carrying vehicle, the rear seat  
2     comprising:  
3                 a seat back coupled to the vehicle;  
4                 a seat base coupled to the vehicle and configured to rotate  
5     from a seating position to a stored position;  
6                 a leg assembly coupled to the seat base and configured to  
7     rotate from a deployed position to a retracted position; and  
8                 an indicator coupled to the seat to indicate a predetermined  
9     condition of the seat base.

1           9.     The rear seat of claim 8, including a leg detent coupled to  
2     the vehicle and configured to engage the leg assembly when the leg  
3     assembly is in the deployed position.

1           10.    The rear seat of claim 8, including a cable coupled to the  
2     seat back and the leg assembly, wherein the cable moves the leg  
3     assembly from the deployed position to the retracted position when the  
4     seat base is moved from the seating position to the stored position and  
5     the leg assembly clears a cargo zone located under at least a portion of  
6     the seat base.

1           11.    The rear seat of claim 8, including a removable bracket  
2     coupled to the leg assembly wherein the removable bracket disengages

Atty. Dkt. No.: 026032-4227

3 the leg assembly from the seat base when a predetermined force on the  
4 leg assembly is exceeded.

1 12. The rear seat of claim 8, including a biasing assembly  
2 coupled to the seat base and leg assembly to assist in moving the leg  
3 assembly from the deployed position to the retracted position.

1 13. The rear seat of claim 8, wherein the indicator includes an  
2 actuator mounted in the leg detent and configured to contact the leg  
3 assembly when the leg assembly is properly engaged with the leg detent.

1 14. The rear seat of claim 13, wherein the indicator is one of a  
2 mechanical member and an electric device.

1 15. A method for automatic retraction of a leg assembly coupled  
2 to a vehicle seat mounted in a vehicle, with the vehicle seat including a  
3 seat back and a seat base, the method comprising the steps of:  
4 providing a cable of a predetermined length;  
5 coupling one end of the cable to the seat back; and  
6 coupling another end of the cable to the leg assembly,  
7 wherein the leg assembly moves from a deployed position to  
8 a retracted position as the seat base is moved from a seating position to a  
9 retracted position and the leg assembly clears a cargo zone located under  
10 at least a portion of the seat base.

1 16. The method of claim 15, including the step of providing a  
2 biasing member coupled to the leg assembly and the seat base configured  
3 to bias the leg assembly from the deployed position to the retracted  
4 position to assist a user of the vehicle seat to move the seat base.

Atty. Dkt. No.: 026032-4227

1           17. The method of claim 15, including the step of providing a leg  
2 detent coupled to the vehicle and configured to engage the leg assembly  
3 when the leg assembly is in the deployed position.

1           18. The method of claim 15, including the step of providing an  
2 indicator coupled to one of the leg detent and the seat base to indicate a  
3 predetermined condition of the seat base.

1           19. The method of claim 18, wherein the indicator includes an  
2 actuator mounted in the leg detent and configured to contact the leg  
3 assembly when the leg assembly is properly engaged with the leg detent.

1           20. The method of claim 15, including the step of providing a leg  
2 bracket coupled to the leg assembly wherein the leg bracket disengages  
3 the leg member from the seat base when a predetermined force on the leg  
4 member is exceeded.

Atty. Dkt. No.: 026032-4227

**ABSTRACT**

One embodiment of the invention relates to a vehicle seat. The vehicle seat comprises a seat back coupled to a vehicle by a base bracket or directly to the vehicle. A seat base is coupled to the seat back and  
5 configured to rotate from a seating position to a stored position. A leg assembly is coupled to the seat base and configured to rotate from a deployed position to a retracted position. An indicator is coupled to the seat base to indicate a predetermined condition of the seat base.

Atty. Dkt. No. 026032-4227

**DECLARATION AND POWER OF ATTORNEY**

As a below named inventor, I HEREBY DECLARE:

THAT my residence, post office address, and citizenship are as stated below next to my name;

THAT I believe I am the original, first, and sole inventor (if only one inventor is named below) or an original, first, and joint inventor (if plural inventors are named below or in an attached Declaration) of the subject matter which is claimed and for which a patent is sought on the invention entitled

VEHICLE SEAT WITH AUTO- FOLD LEG

(Attorney Docket No. 026032-4227)

the specification of which (check one)

  X   is attached hereto.

       was filed on        as United States Application Number or PCT International Application Number        and was amended on        (if applicable).

THAT I do not know and do not believe that the same invention was ever known or used by others in the United States of America, or was patented or described in any printed publication in any country, before I (we) invented it;

THAT I do not know and do not believe that the same invention was patented or described in any printed publication in any country, or in public use or on sale in the United States of America, for more than one year prior to the filing date of this United States application;

THAT I do not know and do not believe that the same invention was first patented or made the subject of an inventor's certificate that issued in any country foreign to the United States of America before the filing date of this United States application if the foreign application was filed by me (us), or by my (our) legal representatives or assigns, more than twelve months (six months for design patents) prior to the filing date of this United States application;

THAT I have reviewed and understand the contents of the above-identified specification, including the claim(s), as amended by any amendment specifically referred to above;

THAT I believe that the above-identified specification contains a written description of the invention, and of the manner and process of making and using it, in such full, clear, concise, and exact terms as to enable any person skilled in the art to which it pertains, or with which it is most nearly connected, to make and use the invention, and sets forth the best mode contemplated by me of carrying out the invention; and

THAT I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

Atty. Dkt. No. 026032-4227

I HEREBY CLAIM foreign priority benefits under Title 35, United States Code § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below any foreign application for patent or inventor's certificate or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number	Country	Foreign Filing Date	Priority Claimed?	Certified Copy Attached?

I HEREBY CLAIM the benefit under Title 35, United States Code § 119(e) of any United States provisional application(s) listed below.

U.S. Provisional Application Number	Filing Date

I HEREBY CLAIM the benefit under Title 35, United States Code, § 120 of any United States application(s), or § 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application Number	PCT Parent Application Number	Parent Filing Date	Parent Patent Number

I HEREBY APPOINT the following registered attorneys and agents of the law firm of FOLEY & LARDNER:

SCOTT D. ANDERSON	Reg. No. 46,521
RUSSELL J. BARRON	Reg. No. 29,512
DAVID J. BATES	Reg. No. 39,902
STEVEN C. BECKER	Reg. No. 42,308
MICHAEL S. BRAYER	Reg. No. 51,495
MARCUS A. BURCH	Reg. No. 52,673
CHARLES G. CARTER	Reg. No. 35,093
ALISTAIR K. CHAN	Reg. No. 44,603

Atty. Dkt. No. 026032-4227

JOHN C. COOPER III	Reg. No. 26,416
SCOTT M. DAY	Reg. No. 52,801
BARRY L. GROSSMAN	Reg. No. 30,844
JEFFREY S. GUNDERSEN	Reg. No. 47,619
PAUL S. HUNTER	Reg. No. 44,787
JOHN M. LAZARUS	Reg. No. 48,367
KENNETH G. LEMKE	Reg. No. 47,746
KEITH D. LINDENBAUM	Reg. No. 40,365
DAVID G. LUETTGEN	Reg. No. 39,282
MICHAEL SCOTT MC BRIDE	Reg. No. 52,008
RICHARD J. MC KENNA	Reg. No. 35,610
JAMES G. MORROW	Reg. No. 32,505
SCOTT C. NIELSON	Reg. No. 50,755
JASON E. PAULS	Reg. No. 45,651
TODD A. RATHE	Reg. No. 38,276
MICHAEL D. RECHTIN	Reg. No. 30,128
MARCUS W. SPROW	Reg. No. 48,580
M. REED STAHELI	Reg. No. 47,959
JEAN M. TIBBETTS	Reg. No. 43,193
CHRISTOPHER M. TUROSKI	Reg. No. 44,456
JOHN A. VANOPHEM	Reg. No. 38,646
JAMES A. WILKE	Reg. No. 34,279
JOSEPH N. ZIEBERT	Reg. No. 35,421
WALTER E. ZIMMERMAN	Reg. No. 40,883

to have full power to prosecute this application and any continuations, divisions, reissues, and reexaminations thereof, to receive the patent, and to transact all business in the United States Patent and Trademark Office connected therewith.

I request that all correspondence be directed to:

James A. Wilke  
FOLEY & LARDNER  
Customer Number: 31050



31050

PATENT TRADEMARK OFFICE





Telephone: (414) 297-5776  
Facsimile: (414) 297-4900

I UNDERSTAND AND AGREE THAT the foregoing attorneys and agents appointed by me to prosecute this application do not personally represent me or my legal interests, but instead represent the interests of the legal owner(s) of the invention described in this application.

I FURTHER DECLARE THAT all statements made herein of my own knowledge are true, and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.



Atty. Dkt. No. 026032-4227

Name of first inventor	Milton S. Soditch
Residence	Brighton, MI
Citizenship	U.S.A.
Post Office Address	7901 Birkenstock Dr. Brighton, MI 48114
Inventor's signature	
Date	5/17/03
Name of second inventor	Sean A. Riley
Residence	South Lyon, MI
Citizenship	U.S.A.
Post Office Address	25965 Cobblers Lane South Lyon, MI 48178
Inventor's signature	
Date	5/17/03
Name of third inventor	Vladimir Nastevski
Residence	Royal Oak, MI
Citizenship	Macedonian
Post Office Address	3412 Starr Royal Oak, MI 48073
Inventor's signature	
Date	05/16/03
Name of fourth inventor	Douglas A. Siewert
Residence	Ann Arbor, MI
Citizenship	U.S.A.
Post Office Address	424 Little Lake Drive Condo 12 Ann Arbor, MI 48103
Inventor's signature	
Date	5/16/03

Atty. Dkt. No. 026032-4227

Name of fifth inventor

Brian Holder

Residence

LIVONIA MICHIGAN

Citizenship

U.S.A.

Post Office Address

15734 SUSSEX  
LIVONIA, MI 48154

Inventor's signature



Date

MAY 16, 2003

Name of sixth inventor

Robert A. Wilson

Residence

Toledo, Ohio


Citizenship

U.S.A.

Post Office Address

4414 Standing Timbers Lane  
Toledo, OH 43623

Inventor's signature



Date

MAY 19, 2003

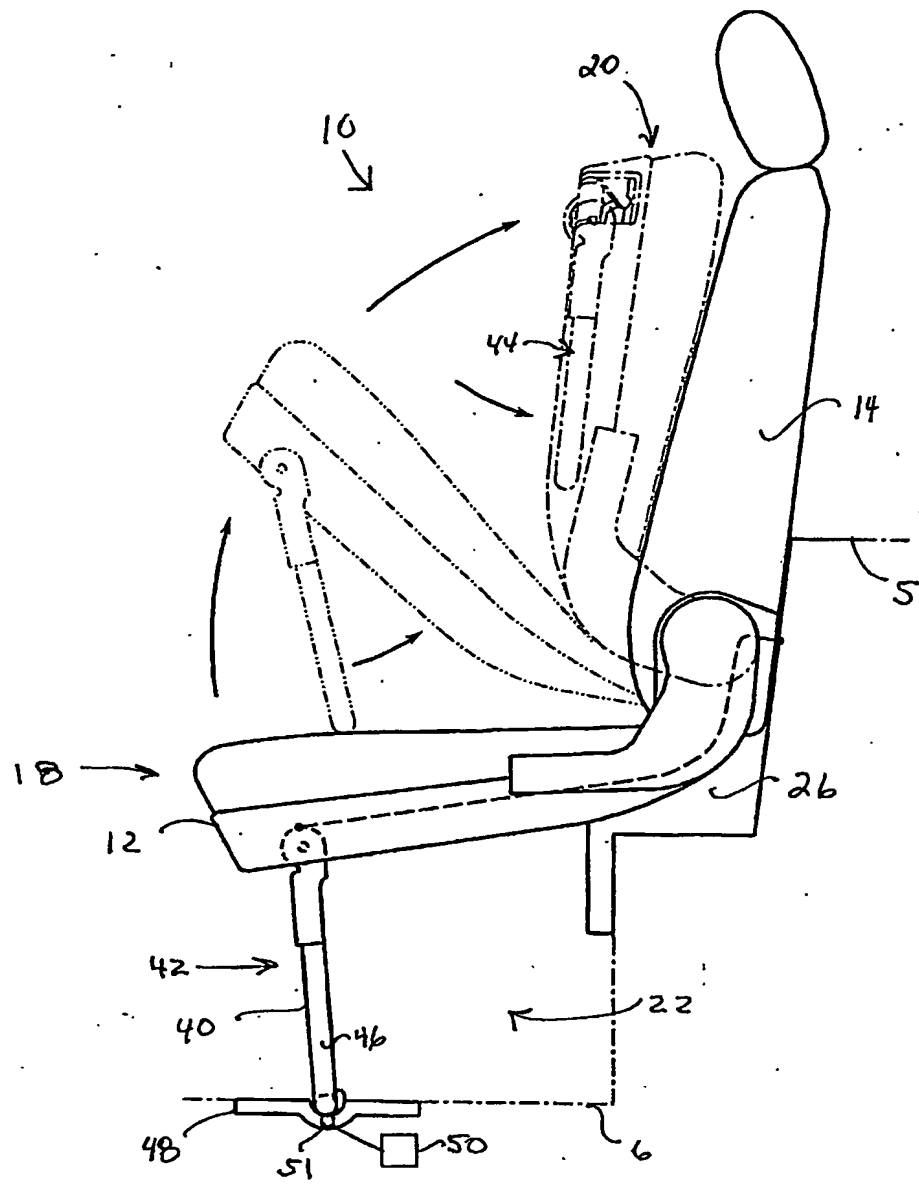
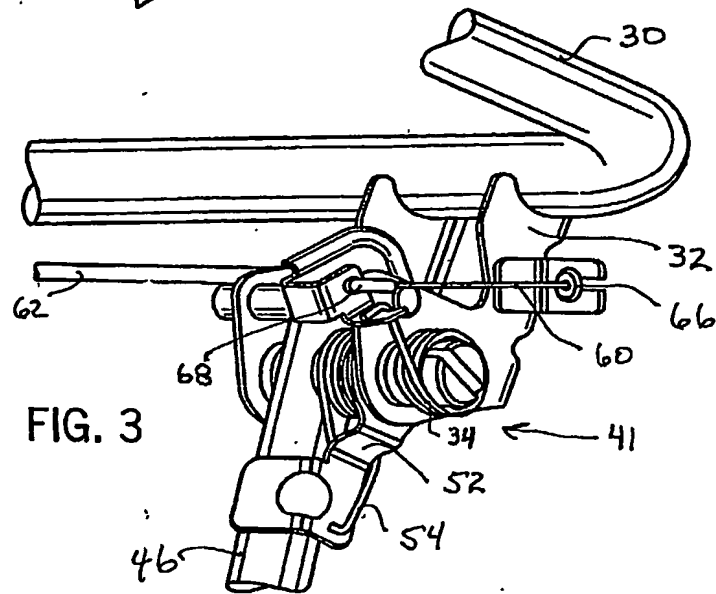
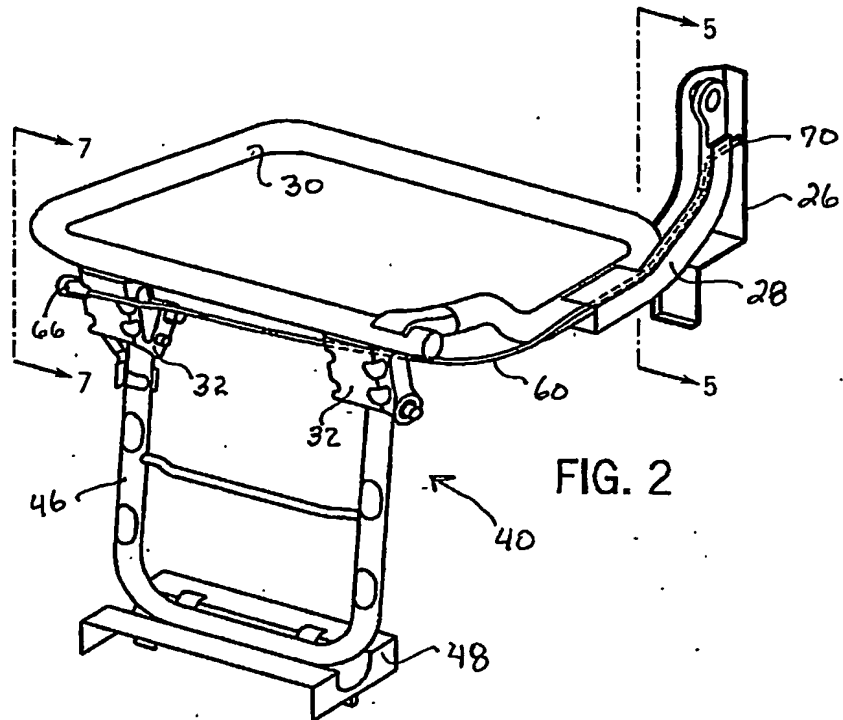


FIG. 1



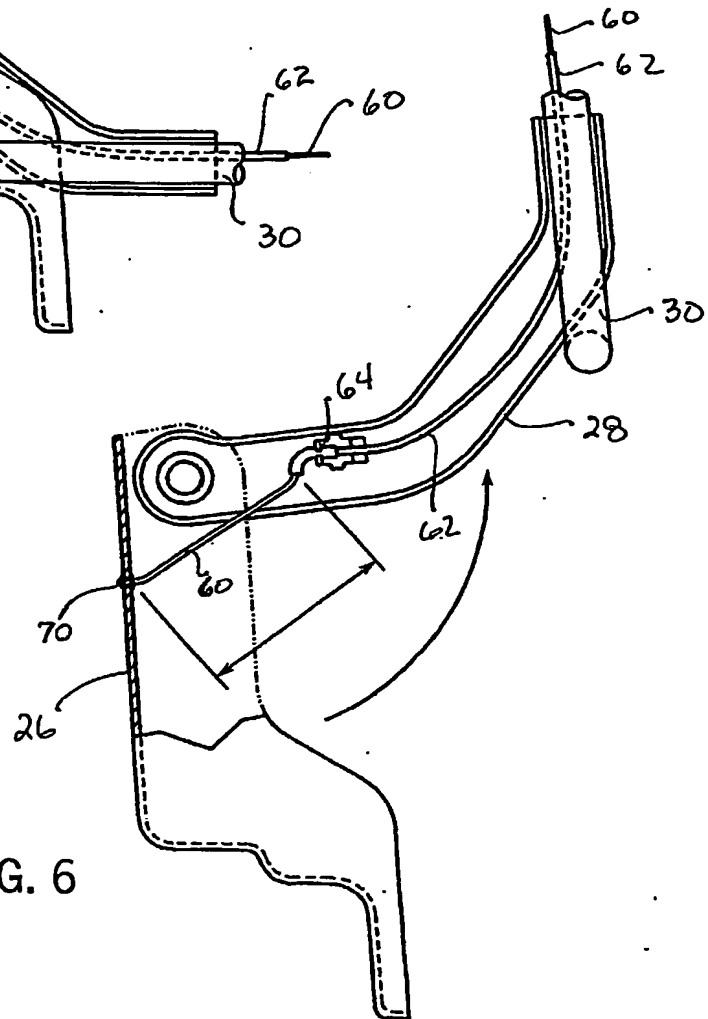
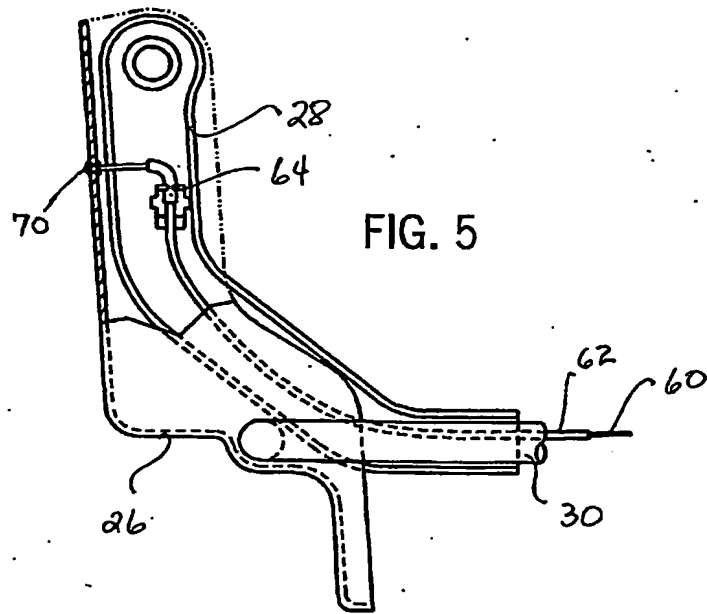


FIG. 7





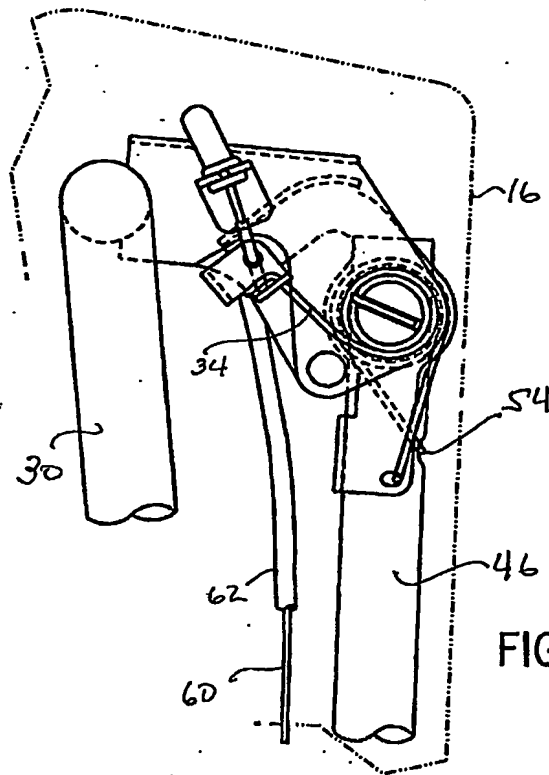


FIG. 8

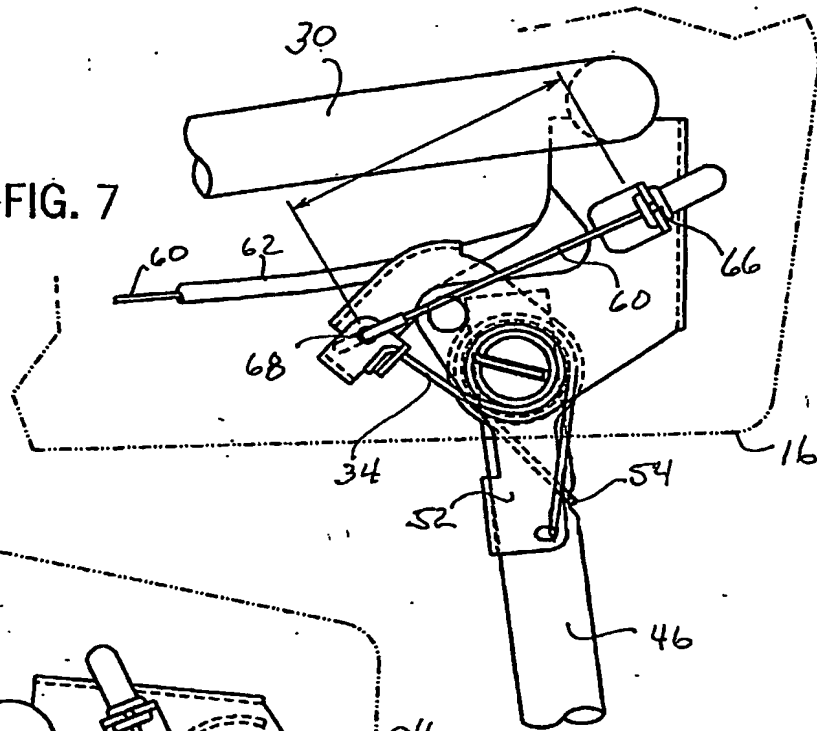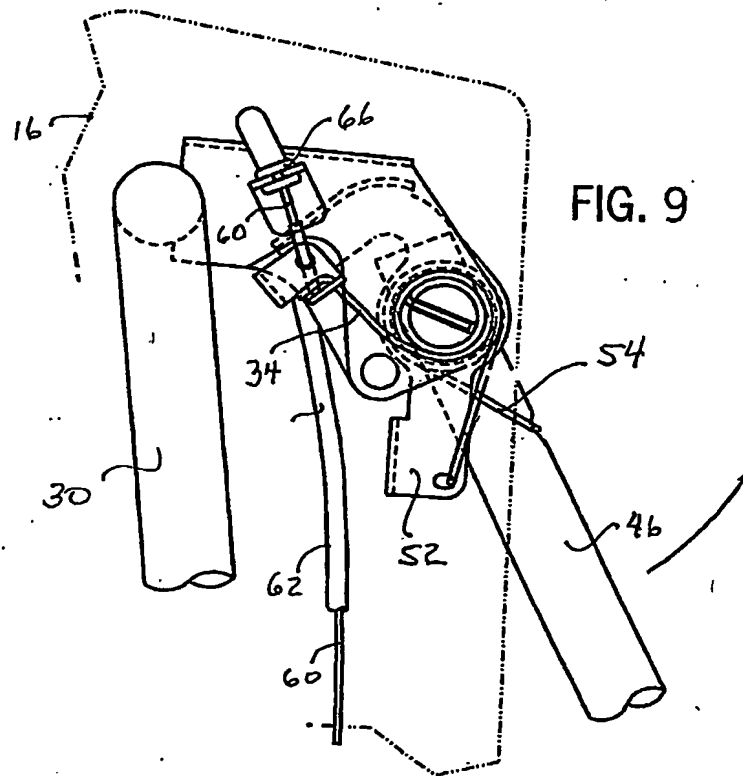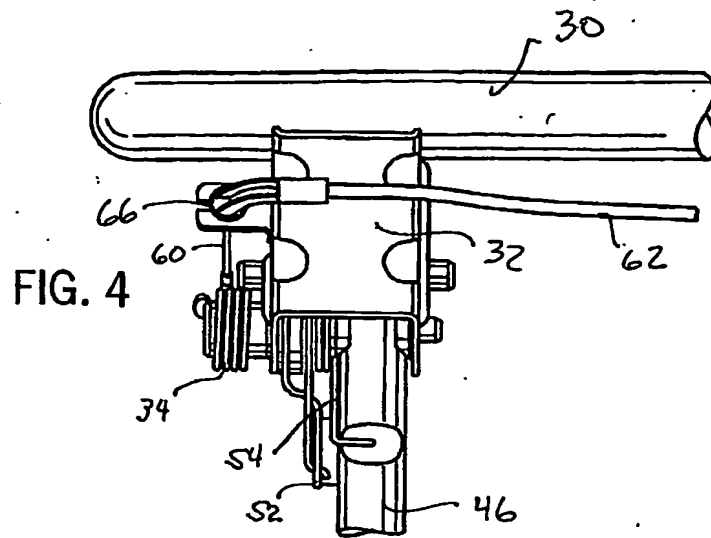

United States Patent & Trademark Office  
Office of Initial Patent Examination -- Scanning Division

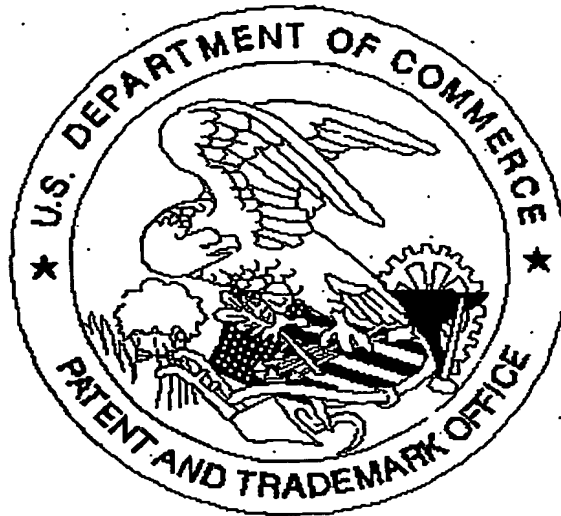

Application deficiencies found during scanning:

☒ Page(s) \_\_\_\_\_ of Application DATA sheet were not present  
for scanning. (Document title)

☐ Page(s) \_\_\_\_\_ of \_\_\_\_\_ were not  
present  
for scanning. (Document title)

☐ *Scanned copy is best available.*